NOTES (UNLESS OTHERWISE SPECIFIED):

A. POLYMER CONCRETE PAD
B. TAPERED SIDES
C. NO FLOOR
D. PAD WEIGHT: 150 LBS ± 5%
E. APPLICATION: PCA1118 SERIES

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL REASE	09/27/24	B. KIM
B	UPDATED DRAWING NOTES	01/02/25	B. KIM

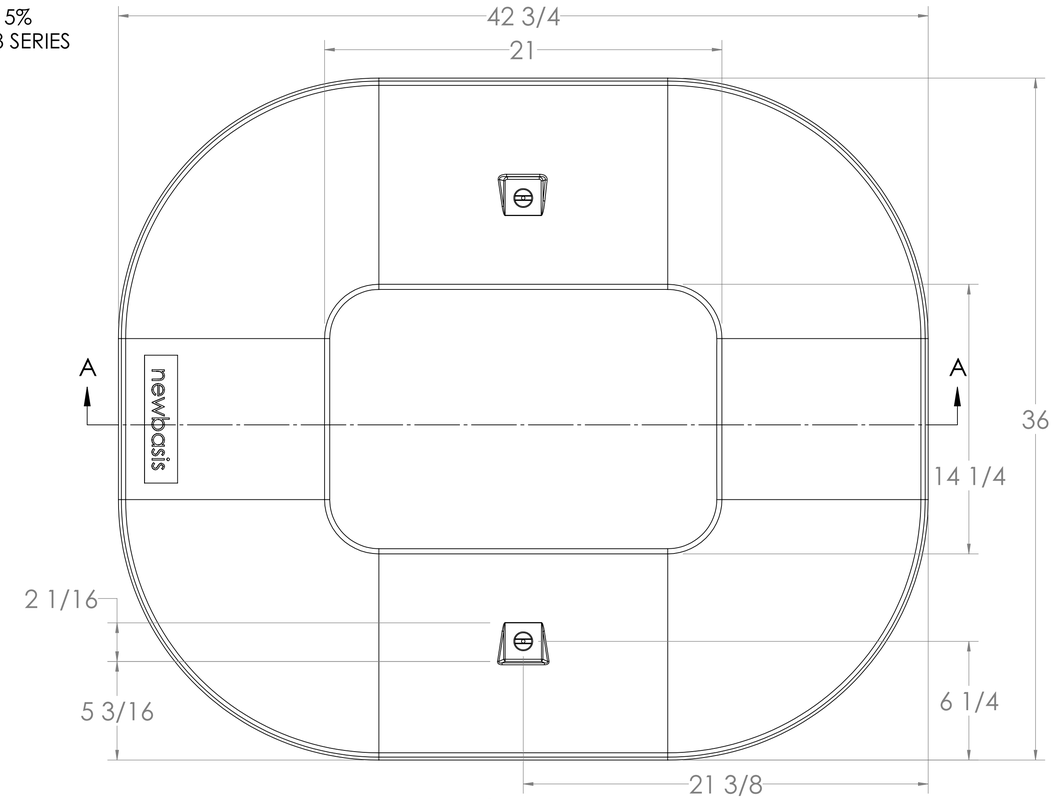

TOP VIEW

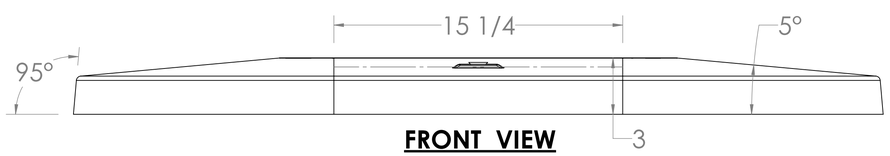

FRONT VIEW

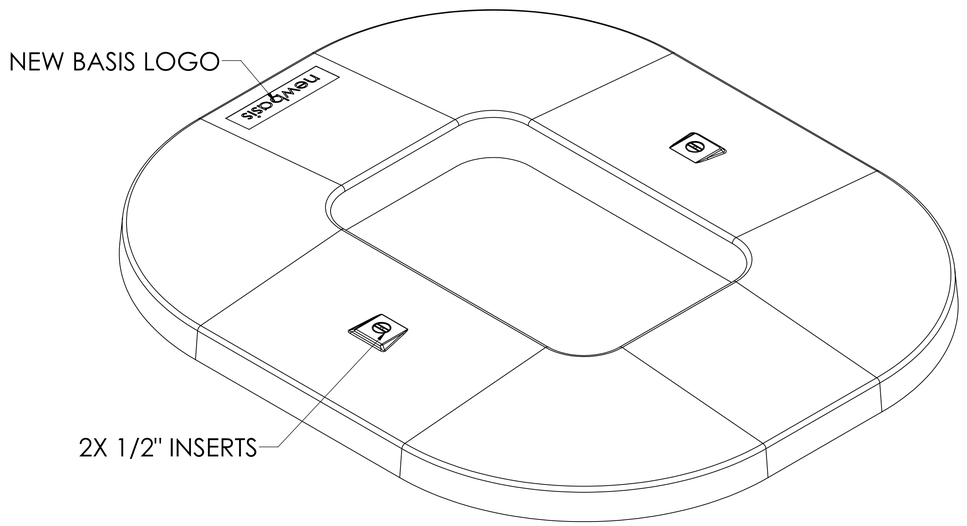

ISO VIEW

newbasis
2626 Kansas Avenue
Riverside, California 92507
951.787.0600
newbasis.com

BUILD AMERICA BUY AMERICA BABA COMPLIANT

CLASSIFIED UL

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL MOLDED: ±1/16 FRACTIONAL FABRICATED: ±1/8 ANGULAR: ± 0.5° ONE PLACE DECIMAL: ±.1 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	DRAWN	B. KIM	09/27/24
	APPROVED		
	MATERIAL:		

newbasis Composites for Infrastructure
2626 Kansas Ave.
Riverside, CA 92507
(951)787-0600
newbasis.com

PART NO.
PP3642

DESCRIPTION:
POLYMER PAD 36 X 42

DO NOT SCALE DRAWING

SIZE	REV
D	B

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NEWBASIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NEWBASIS IS PROHIBITED.