NOTES (UNLESS OTHERWISE SPECIFIED):

A. POLYMER CONCRETE
B. SKID RESISTANT PAD
C. PAD WEIGHT: 253 LBS ± 5%
D. APPLICATION: TBD

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/10/2023	B. KIM
B	CLEANED UP DRAWING, ADDED APPLICATION SPECIFIC NOTES	01/02/2025	B. KIM

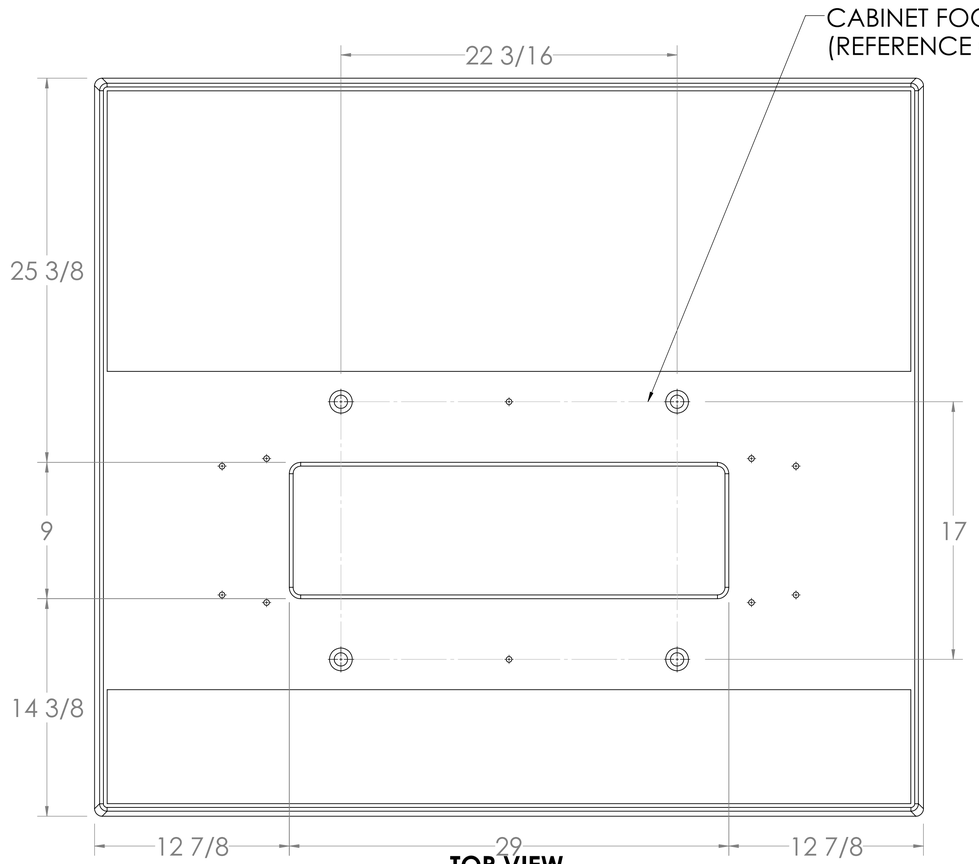

TOP VIEW

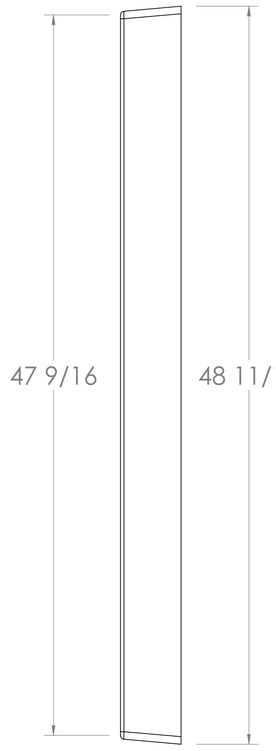

SIDE VIEW

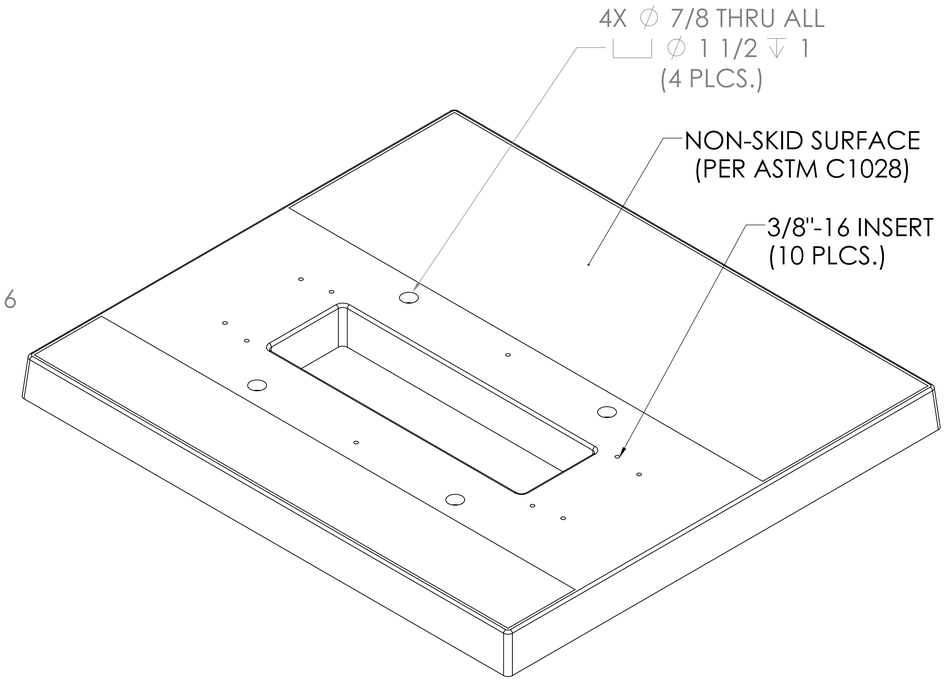

ISO VIEW

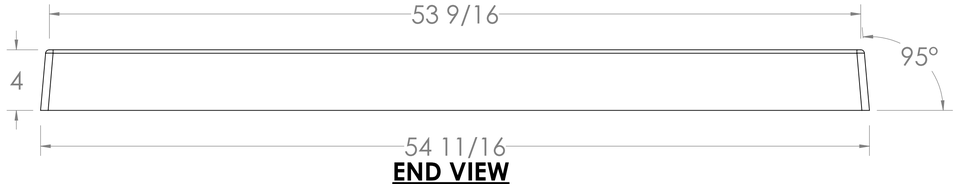

END VIEW

newbasis
2626 Kansas Avenue
Riverside, California 92507
951.787.0600
newbasis.com

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL MOLDED: ±1/16 FRACTIONAL FABRICATED: ±1/8 ANGULAR: ± 0.5° ONE PLACE DECIMAL: ±.1 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	DRAWN	OR	7/10/2023
	APRROVED		
	MATERIAL:	PC3000	
	FINISH:		

newbasis Composites for Infrastructure
2626 Kansas Ave.
Riverside, CA 92507
(951)787-0600
newbasis.com

DWG. NO.
PP4854A

DESCRIPTION:
POLYMER CONCRETE PAD

WEIGHT: | SIZE D | REV B

DO NOT SCALE DRAWING | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NEWBASIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NEWBASIS IS PROHIBITED.