NOTES (UNLESS OTHERWISE SPECIFIED):

A. POLYMER CONCRETE
B. SKID RESISTANT PAD
C. PAD WEIGHT: 335 LBS ± 5%
D. APPLICATION:
   - FONS 144/216
   - ADC 216/432
   - ACE 102/153

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/10/2023	B. KIM
B	UPDATED DRAWING NOTES	01/02/2025	B. KIM

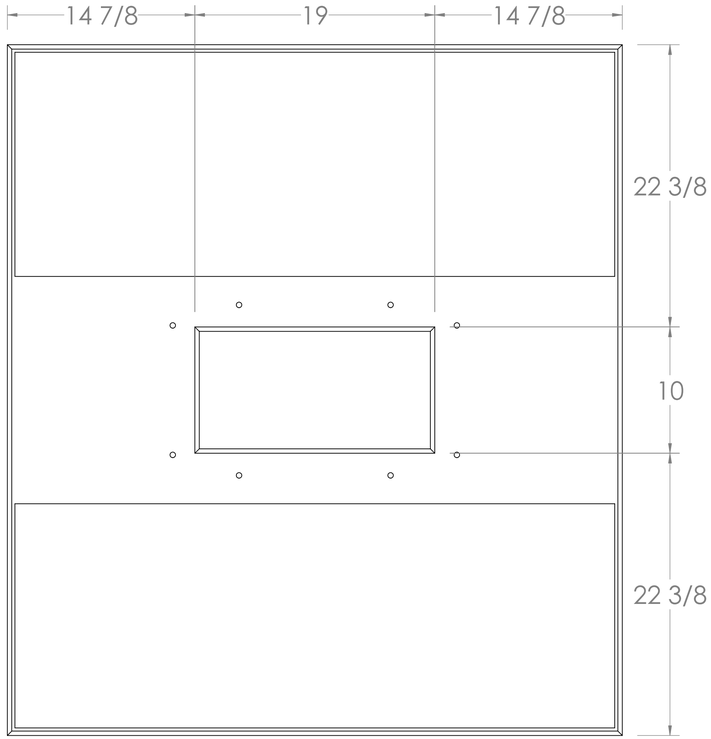

TOP VIEW

SIDE VIEW

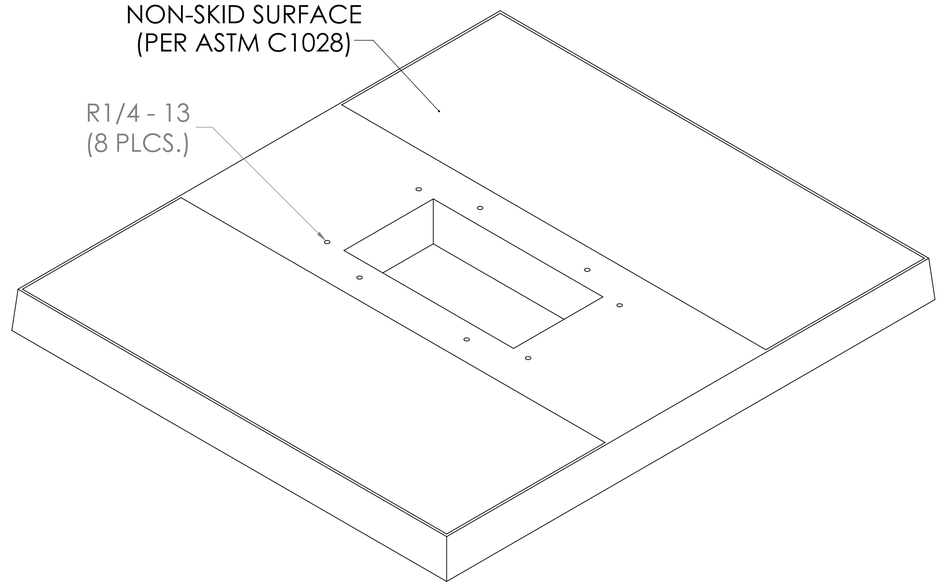

ISO VIEW

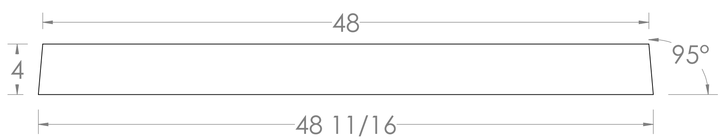

END VIEW

newbasis
2626 Kansas Avenue
Riverside, California 92507
951.787.0600
newbasis.com

BUILD AMERICA BUY AMERICA BABA COMPLIANT

CLASSIFIED UL

		NAME	DATE
UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL MOLDED: ±1/16 FRACTIONAL FABRICATED: ±1/8 ANGULAR: ± 0.5° ONE PLACE DECIMAL: ±.1 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	DRAWN	OR	8/2/2023
	APRROVED		
	MATERIAL: PC3000		
	FINISH:		

newbasis
Composites for Infrastructure
2626 Kansas Ave.
Riverside, CA 92507
(951)787-0600
newbasis.com

DWG. NO.
PP4854C

DESCRIPTION:
PC PAD

WEIGHT:

SIZE D | REV B

DO NOT SCALE DRAWING

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NEWBASIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NEWBASIS IS PROHIBITED.