NOTES (UNLESS OTHERWISE SPECIFIED):

A. POLYMER CONCRETE
B. SKID RESISTANT PAD
C. PAD WEIGHT: 468.9 LBS ± 5%
D. APPLICATION: PCA3048 SERIES

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/10/2023	B. KIM
B	UPDATED DRAWING NOTES	01/02/2025	B. KIM

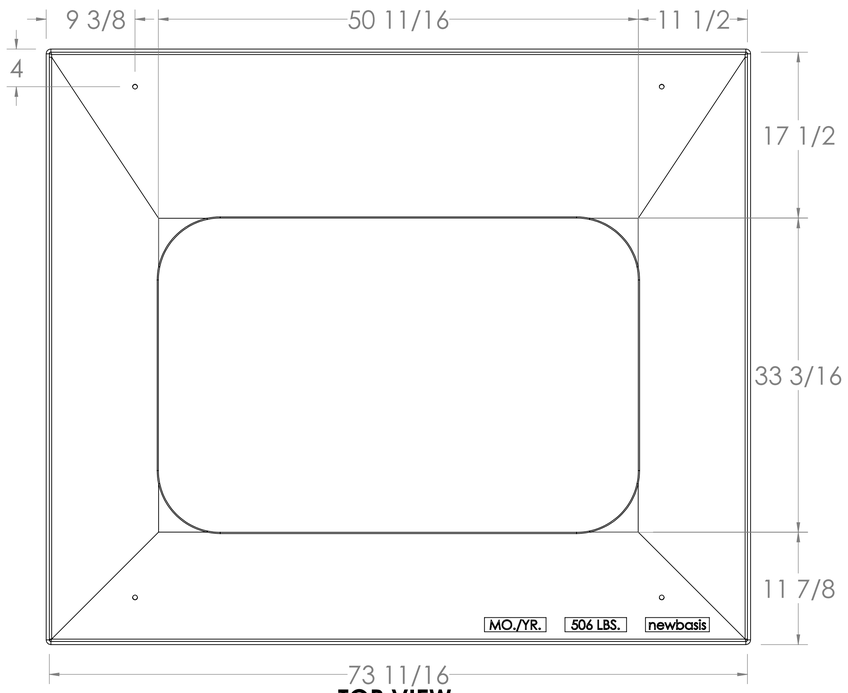

TOP VIEW

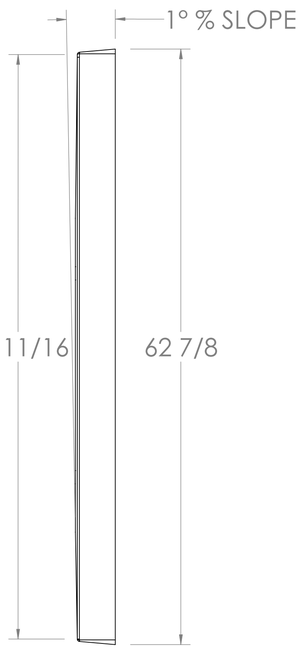

SIDE VIEW

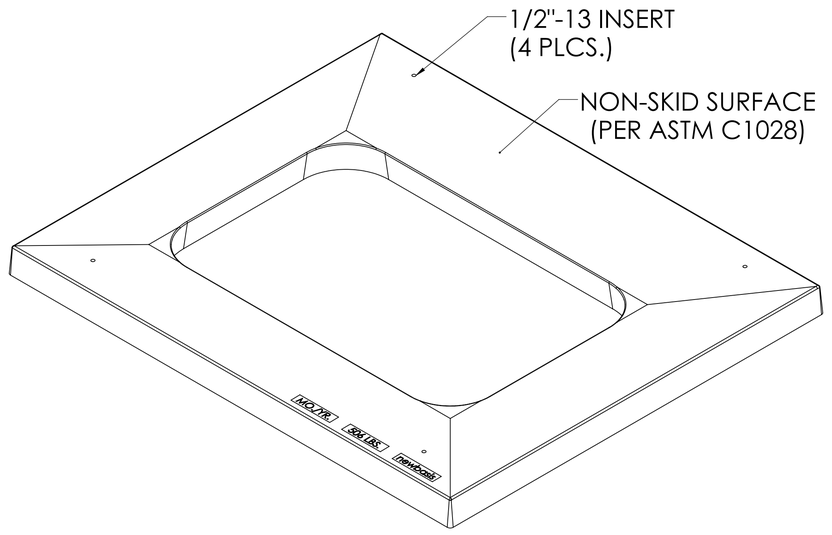

ISO VIEW

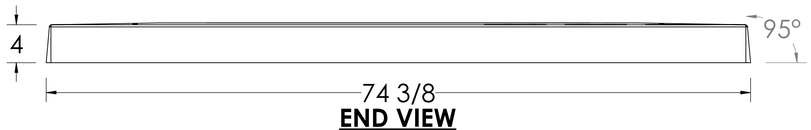

END VIEW

newbasis
2626 Kansas Avenue
Riverside, California 92507
951.787.0600
newbasis.com

BUILD AMERICA BUY AMERICA BABA COMPLIANT

CLASSIFIED UL

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL MOLDED: ±1/16 FRACTIONAL FABRICATED: ±1/8 ANGULAR: ± 0.5° ONE PLACE DECIMAL: ±.1 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL ± .003 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	DRAWN	OR	7/10/2023
	APRROVED		
	MATERIAL:	PC3000	
	FINISH:		

newbasis Composites for Infrastructure
2626 Kansas Ave.
Riverside, CA 92507
(951)787-0600
newbasis.com

DWG. NO.
PP7462

DESCRIPTION:
POLYMER CONCRETE PAD

WEIGHT: | SIZE D | REV B

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NEWBASIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NEWBASIS IS PROHIBITED.

DO NOT SCALE DRAWING | SHEET 1 OF 1